



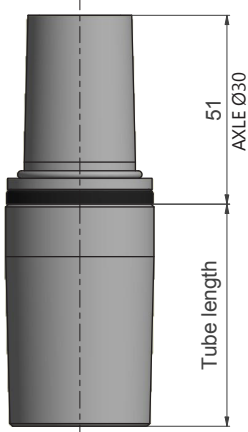

- > All tubes are available as a standard option
- > All tubes can be customized to accommodate special requirements
- > All tubes can be combined with more products for complete solution

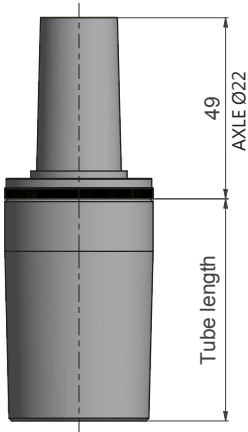

## Functionality and benefits

- > Center tubes in high quality and stability  
- patented since 1965
- > Ensures smooth movement and turning function
- > Suitable to lead electrical cables

## Technical specifications

- > Standard top axle of 22 or 30 mm (MK3)
- > Axle Ø22 minimum lengths:
  - > 49 + tube length of 67 mm and up  
*(tube length down to 55 upon special request)*
- > Axle Ø30 minimum lengths:
  - > 51 + tube length of 67 mm and up  
*(tube length down to 55 upon special request)*
- > Standard tube diameters of Ø40, Ø45 and Ø50
- > Prepared in steel
- > Surface options: brushed steel, chrome, powder coating

**\* When ordering please specify tube length**

## Compatible with more products

This mechanism can be combined with more products including frames, triggers, adapters, center tubes, bases and swivels.

CLICK and find all our products online

MECHANISMS,  
MOTORS ETC

BASES AND  
SWIVELS

STEEL PARTS, POWDER  
COATING ETC

HEALTHCARE AND  
LIFT SYSTEMS

MOULDED  
FOAM

SEWING AND  
UPHOLSTERY



- > Simplify your supply chain
- > Secure strong cooperation
- > Experience hands-on support

